

PROCÉDURE DE TRAVAIL
SÉCURITAIRE POUR LE MONTAGE
D'ÉTAIEMENTS DE TYPE TABLA

REPRODUCTION INTERDITE

Coffrage Santco est conscient de l'importance de la santé et de la sécurité des travailleurs relativement aux risques relié au montage d'étaie et souhaite éviter tout accident ou incident en cours de travaux. À cet effet, la procédure ci-jointe a été élaborée.

MONTAGE D'ÉTAIEMENT DE TYPE TABLA


Erection

Step 1

Extend Props to required working height and insert the Quick-Release Locking Pin.

Step 2

Prepare Bracing Gates to build an "L" shaped tower by assembling one Bracing Gate and two Props. Insert and lock the Gate Brace to the Props utilizing the attached Wedges.

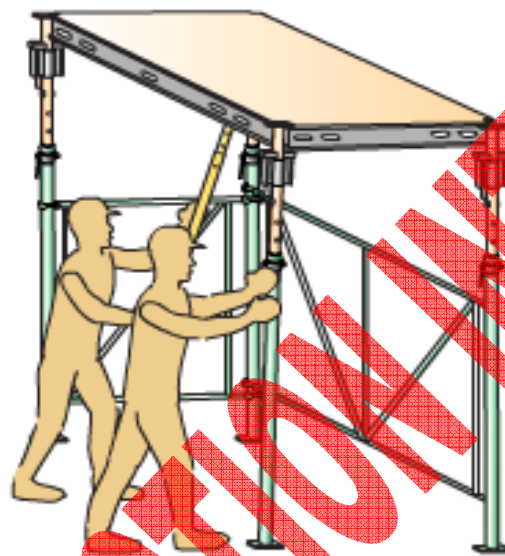

Step 3

Attach a second Gate Brace at 90° to one of the props in the same manner as in Step 2.

Step 4


Tilt the Tabla assembly into the upright position and prepare to attach the third Prop to the free end of the Bracing Gate.

Step 5

Square up the "L" shaped tower (3 Props and 2 Gate Braces).

Step 6

Hang the Panel on the two Props making sure that the legs of the Panel are firmly seated in the cups of the Tabla Head Assembly. Rotate Panel to allow insertion of ADT and continue to rotate upwards.

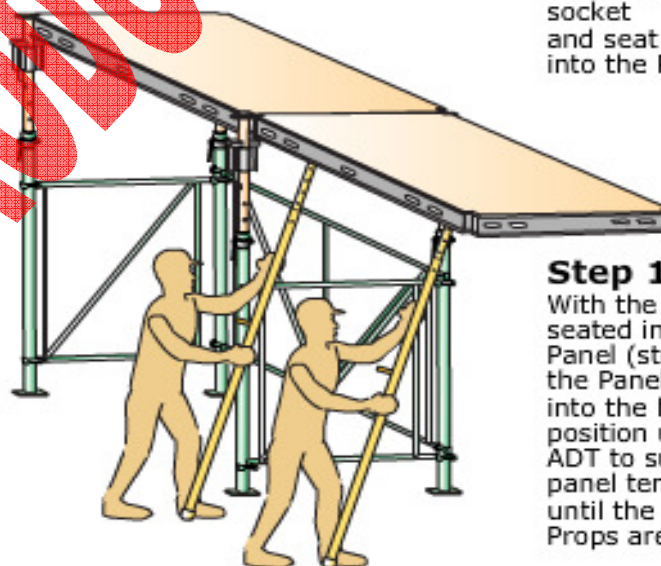

Step 7

With the ADT seated into the Panel, step 6, rotate the Panel into the horizontal position and support the Panel until the forth Prop is installed.

Step 8

Place the fourth Prop under the Panel corner socket and seat the Panel into the Prop Head.


Step 9

Hang the next Panel, as in step 6, and swivel to horizontal.

Step 10

With the ADT seated into the Panel (step 6) and the Panel rotated into the horizontal position use the ADT to support the panel temporarily until the next 2 Props are installed.


Stripping

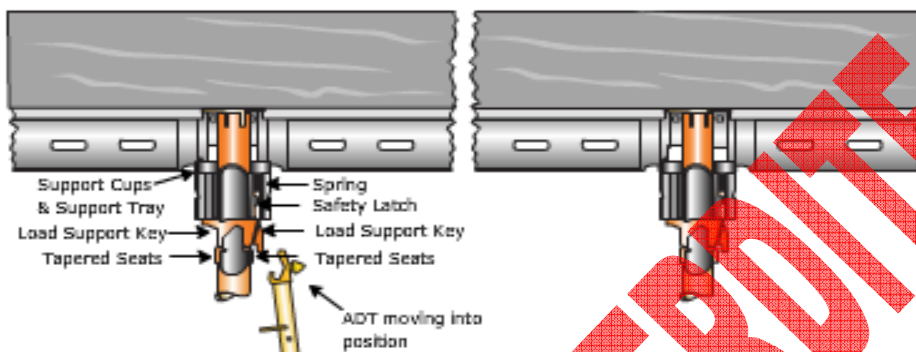

Step 1
Pouring Position.

Step 2
Moving into position with ADT to unlock Panel support assembly.


Step 3
Engage the ADT.

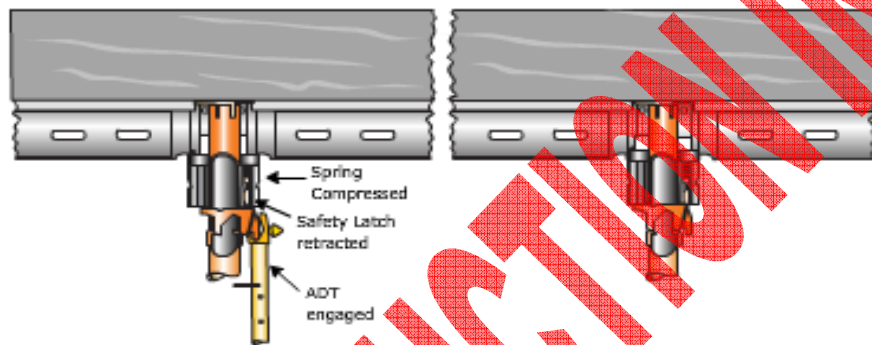

Step 4
Panel support assembly is unlocked and has dropped away from Panel.

Step 5
Pull Panel down using ADT (both ends). Use notch and Stripping Bar if necessary to break bond.

Step 6
Panel stripped, level and engaged in all 4 cups.

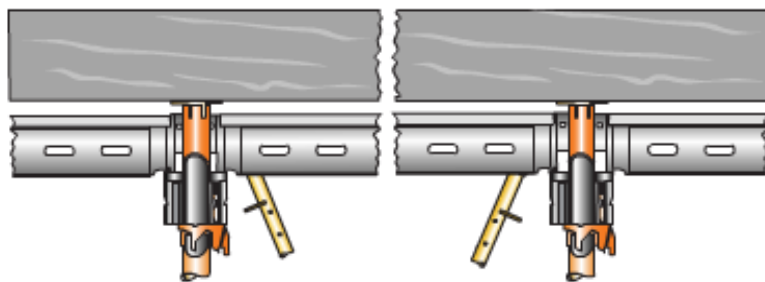


Step 7
Push tail of panel up. Slide panel forward in cups clearing back cups.


Step 8
Feet remain in engaged cups. Lower (hinge) panel down.

Step 9
In position to remove Panel.


Shoring

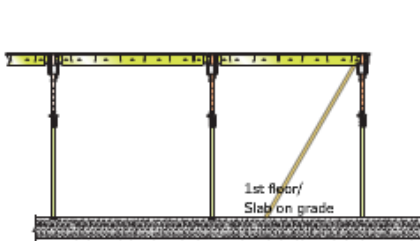

STEP 1
 Erect Tabla Shoring System from floor slab.

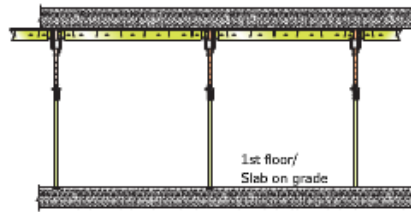


STEP 2
 Shoring complete, pour second floor.

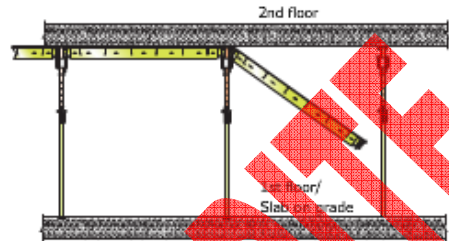


STEP 3
 Once concrete reaches 2000 psi, remove Tabla Panels. Leave Table Props undisturbed.


Backshoring, Shoring

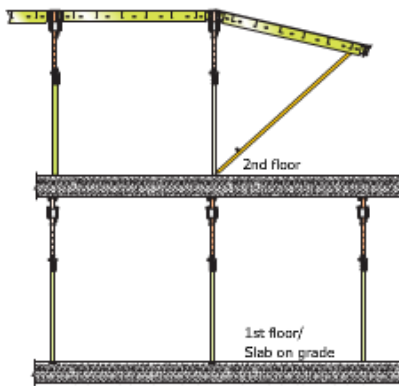

STEP 4
 Erect third floor with additional Props. Leave Tabla Backprops undisturbed.

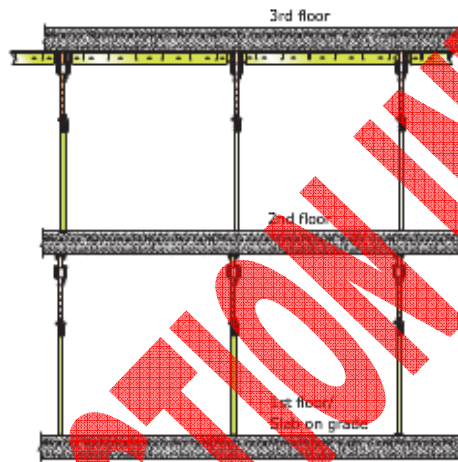


STEP 5
 Shoring for third floor complete, pour third floor.

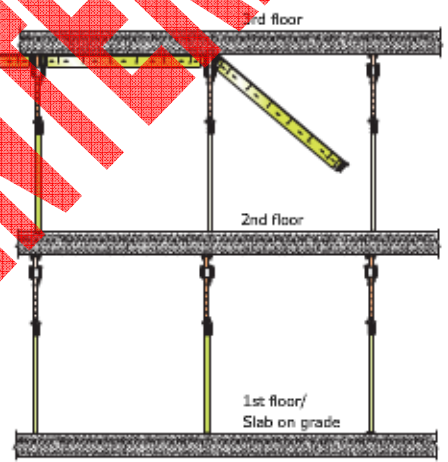


STEP 6
 Once concrete reaches 2000 psi, remove Tabla Panels from under third floor. Leave Tabla Props undisturbed.


Reshoring, Backshoring, Shoring

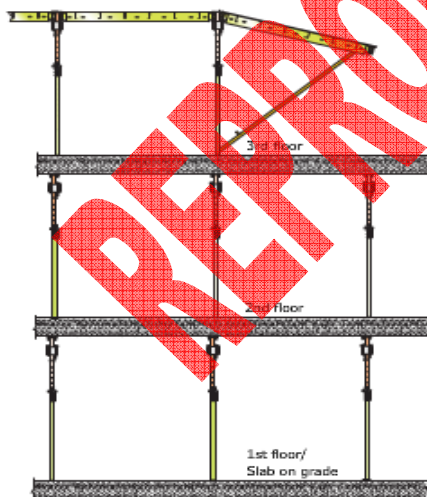


STEP 7
 Erect 4th floor with additional Props.

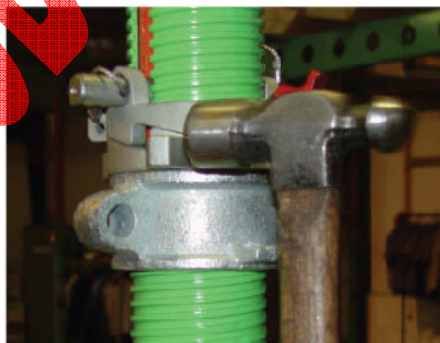

STEP 8
 Convert the lowest level of Props from backshoring to reshoring by striking the Quick Release above the Prop Collar. Release the load in the section as required by site Engineers. Allow the floor to "Take Up" self weight then snug up the Props.

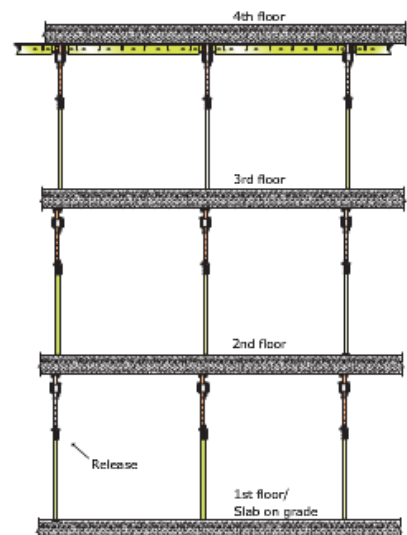


STEP 9
 Shoring for fourth floor complete, pour fourth floor.

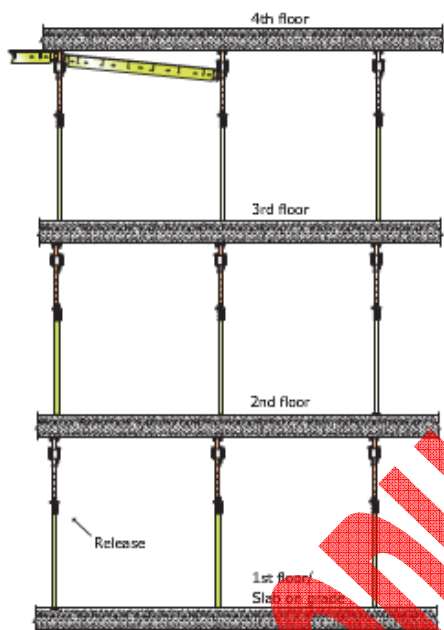

STEP 10

Once concrete reaches 2000 psi, remove Table Panels from under forth floor. Leave Table Props undisturbed.

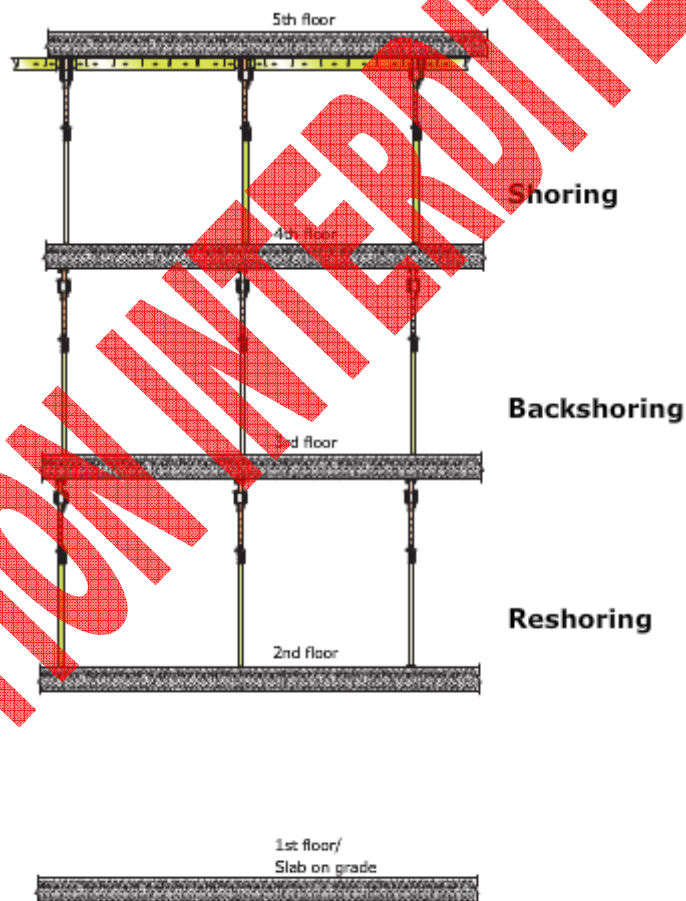

STEP 11

Remove Props supporting second floor and recycle them to the forth floor.

Les méthodes ci-dessus sont obtenues du fabricant et suivent alors les recommandations requises tout en restant sécuritaire.

Les travailleurs ci-dessous ont pris connaissance de la présente procédure.

Nom du projet : _____

Date _____

Signatures des travailleurs

Nom en lettres moulées

Signature

_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

